

Remote Strobe Light

Key Features

- ▶ Mains powered
- ▶ No battery backup required
- ▶ Activated by Ei128/428 relay modules
- ▶ SAB300C (Clear)
- ▶ SAB300R (Red)



Product Description

The SAB300 is a remote strobe that runs on 230V AC mains power (without any battery back up for periods of mains failure).


The SAB300 is activated by interconnected smoke detectors via the Ei128R relay base

The SAB300 has the ability to be interconnected to up to twelve alarms to allow any of the alarms to activate the SAB300.

The SAB300 can be supplied with either a red or clear lens and can be sited internally or externally (with full IP65 rating)

Installation & Placement

Wiring for SAB300 and Ei128R

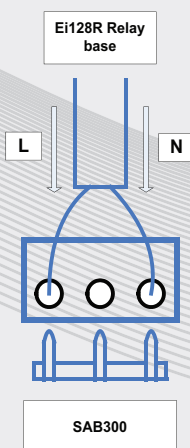

Technical Specification

Supply Voltage:	200 - 250VAC 50/60Hz
Battery backup:	Not required
Flash Rate:	0.9Hz (nominal)
IP Rating:	IP65
Temperature:	Operating - 2 to 40°C Storage - 0 to 35°C (dry area)
Humidity Range:	0% to 90% Relative Humidity
Material:	UL94VO flame retardent
Warranty:	5 years
Dimensions:	85mm x 81mm
Weight:	145g
Warranty:	5 year (limited) warranty